



שירטרוניקס בע"מ
כתובת לשלוח דואר: ת.ד. 437 שימshit 17906 ישראל, מושב זריזה+

זריזה

טלפון: 04-9938666, פקס: 04-9938777

عنوان משרשה: 513501064

web site :www.shirtronics.com

e-mail :info@shirtronics.com

60203045

TL-680CA



Product Standards

Cabinet

exterior : H1950xW600xD660mm

Cabinet


interior : H1800xW590xD630mm

1. Extreme Speed Desiccating

Performance

- EDRY leads the world to launch the extreme speed desiccating ultra low humidity main desiccating unit to lower the humidity level to less than 10% within 30 minutes and maintain stable 1%RH lowest humidity level in long period of time.

2. Speedy Humidity Reduction.

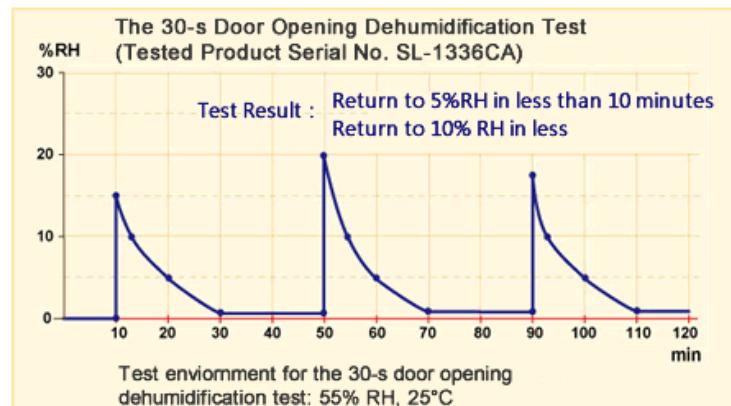

3. Patented Speedy Desiccation

- EDRY Desiccators core machine can maintain a maximum of 26 hours of dehumidification capability. Open the door repeatedly also enables humidity level speedy reduction, which effectively improve work efficiency and product yields. The dehumidification capacity is much better than other brands "Dry Cabinet from other brand can only maintain 7 to 8 hours of dehumidification capability."

4. World Leading Ultra Low Humidity Patented Technology

- EDRY Extreme Speed Main Desiccating Unit won three key patents. All it takes is one main desiccating unit will bring humidity level down to 1% easily. This is not only reducing energy consumption, but also reduces future maintenance cost. TL-680CA meets IPC/JEDEC J-STD-033A and SMD processing requirement standards.



5. Smart Humidity Control by Microcomputer

- The best performance range is 1-20%RH ultra low humidity dry storage.
- It can switch displays between temperature and humidity level.
- It is equipped with humidity level recording function to check humidity level within 24hrs.
- The low humidity specialized sensor is made in the USA by Honeywell with stability, accuracy and credibility.



6. Detail Attention Inside Out, Quality Design

- Dry Cabinet body use the best grade 1mm strengthened steel plate
- Anti-static painting. / Anti-static laminates. / 3mm Anti-static glass. / Conductive moving wheel / $1M\Omega$ ground wire. All anti-static features design to prevent the impact of static electricity to the storage items due to low humidity environment.

Optional:

We also offer rapid dehumidification options for 30 seconds door opening, 5 minutes, 15 minutes, and 30 minutes.